

# 21.5" Full HD Video Monitor


## Professional Video TFT LCD Monitor

### FEATURES

- Social Video Processor.
- NTSC / PAL Auto Switch.
- Aluminum panel Frame.Metal Case.
- VESA Standard Bracket.
- Automatic Color Control and Color Killer.
- PIP Cntrl Function (PC / Video).
- Screen protector(Anti-blur / Image auto move).
- 3D De-interlace Technology.
- 3D Comb Filter Technology.
- 1080P Supported.
- Friendly OSD Menu.
- Sharpness Enhancement.
- Black Level Extension.
- Shortly Response Time Between Source Switching.
- With M-Star IC.
- Monitor Identification Setting Function.
- 3-D Video Noise Reduction.
- 10 Bit Display Color Processing.



### CONNECTORS

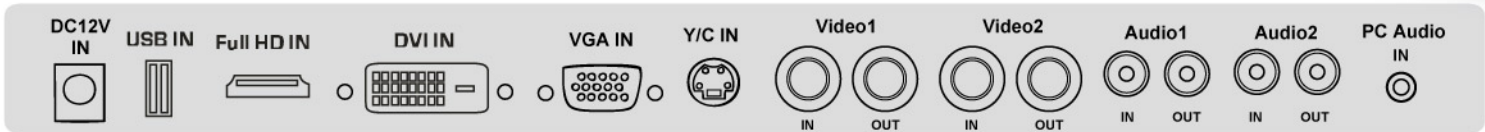

### SPECIFICATIONS

MODEL	CH-L215AV-HMDEL
Operating System	NTSC / PAL Auto Switch
LCD Panel	21.5" Wide Screen
Viewable Area (H/V-mm)	476.64 x 268.11
Profile Ratio	16:9
Max. Resolution (H/V)	1920 x 1080
Display Color	16.7M
Brightness (nit)	250(LED BL)
Contrast Ratio	5000:1
Response Time (Tr/Tf-ms)	3.8 / 1.2
Viewing Angle (U/D/L/R)	89 / 89 / 89 / 89
Input Video Signal	2x(Composite Video):1.0Vp-p 75Ω , 1x(S-Video) , Y(1.0-Vp-p) , C(0.285-V-p-p) , 1x(Analog RGB)
Input Audio Signal	2 x Audio R/L 50~100m vp-p:1 x PC Audio
Input / Output Impedance	75Ω Auto Termination
Panel Frame	Aluminum
Remote Control	YES
3D De-interlace Function	YES
3D Comb Filter Function	YES
PIP / POP Function	YES ( PC / Video)
Screen Protecior	YES
Video Connector	BNC (in) x 2 , BNC (out) x 2 , 4P Mini Din In/Out x 1 , 15Pin D-Sub x 1
Audio Connector	1CH RCA Jack (R/L) In x 1, 1CH PC Phone Jack In x 1, Audio Speaker x 2 (7W+7W)
Environment	Operating:(0°C~50°C)/Humidity:10%~85%(32°F~122°F) Storage: (30°C~122°C)/Humidity:10%~85%(-20°F~60°F)
Power Consumption	AC 90~264 VAC 60/50HZ,Global Switching Power Supply
Power Supply	22W
Net Dimension (W x H x D)	532.2 x 323.3 x 56.7mm (20.9x12.7x2.23Inch)
Net Weight	5.4kgs (11.9lbs)

### INTERFACE

